

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
14 July 2005 (14.07.2005)

PCT

(10) International Publication Number
WO 2005/064152 A3

(51) International Patent Classification⁷: **F03D 1/00**,
E04G 3/10

(21) International Application Number:
PCT/DK2004/000930

(22) International Filing Date:
30 December 2004 (30.12.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PA 2003 01955 30 December 2003 (30.12.2003) DK
PA 2004 00737 8 May 2004 (08.05.2004) DK

(71) Applicant (for all designated States except US): PP EN-
ERGY APS [DK/DK]; Nordborgvej 81, DK-6430 Nord-
borg (DK).

(72) Inventor; and

(75) Inventor/Applicant (for US only): TEICHERT, Paul
[DK/DK]; Nørlundvej 16, DK-6710 Esbjerg V (DK).

(74) Agent: PATENTGRUPPEN APS; Arosgaarden,
Aaboulevarde 31, DK-8000 Aarhus C (DK).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA,
ZM, ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: DEVICE FOR ENABLING ACCESS TO A STRUCTURE ABOVE GROUND LEVEL

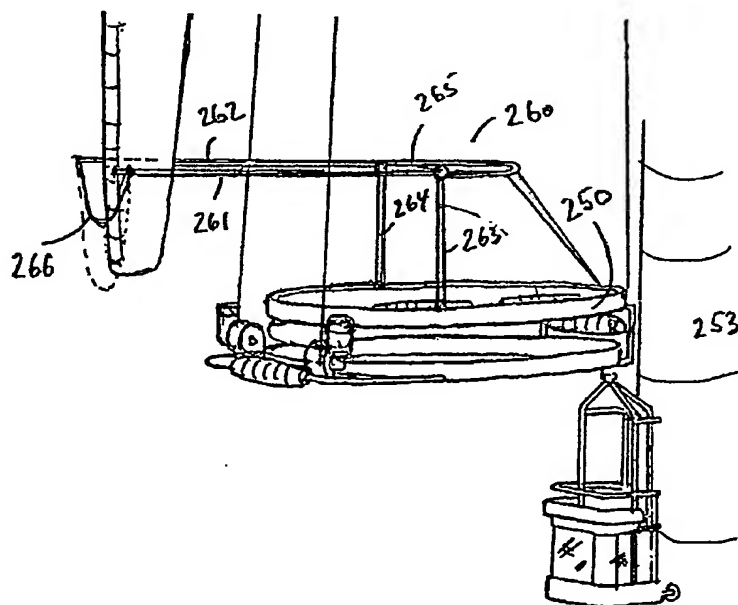

BEST AVAILABLE COPY

(57) Abstract: The present invention relates to a device for enabling access to a structure above ground level by lowering and/or lifting the device in relation to the structure, the device comprising a first endless frame structure defining an opening, wherein at least part of the first endless frame structure forms a track portion, the track portion being adapted to guide an, in relation to the track portion, movable object, such as a gondola, along the track portion. The device may further comprise a second endless frame structure defining an opening, the second endless frame structure being aligned with the first endless frame structure.

WO 2005/064152 A3



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(88) Date of publication of the international search report:
9 September 2005